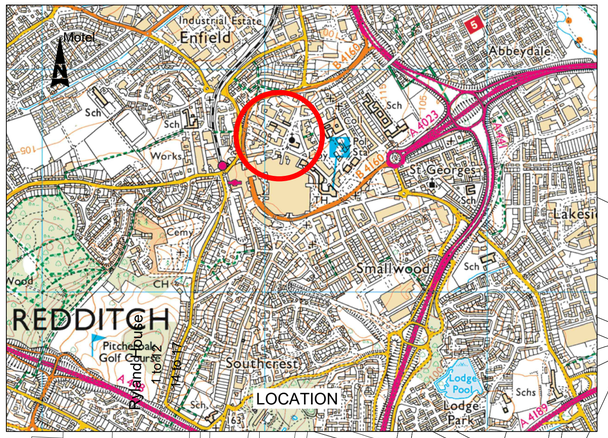

Multistorey Car Park

Club

Smallwood House

Scheme tie-in and extent of carriageway resurfacing.

Cycleway narrows to tie-in with existing layout.

New kerb radius.

College

Halcyon Centre

Beech House

CHURCH ROAD

ADELAIDE STREET

ADELAIDE STREET

All existing hedges and benches to be removed a long Church Green West.

Surgery

Surgery

WILLIAM STREET

1.5m wide designated Cycle Lane in contrasting Green surface colour with rumble strip on off side.

Bank

CHURCH GREEN WEST

New Tarmac surfacing for areas North and West of Church.

SMALLWOOD ARCH

Resin bound gravel or material of similar appearance for areas South and East of Church.

CHURCH GREEN EAST

HERBERT STREET

New Semi Mature Trees along Church Green West.

Posts

Car Park

Car Park

REDDITCH RINGWAY

New Semi Mature Tree.

Pound Yard

Landscaping planter removed to acheive widened footway.

BATES HILL

Reduced number of bollards.

New kerb radius.

Bank

St Stephen's Church

Bank

New bollards at area of widened footpath.

New Autumn Woburn block paving.

Traffic Calming measures retained.

1.5m wide designated Cycle Lane in contrasting Green surface colour with rumble strip on off side.

Kerb line realigned to allow for 1.5m cycle lane.

UNICORN HILL

PH

Car Pk

PH

Ecumenical Centre

Market Place

Church Green House

Bank

New Disabled bay introduced

New Loading bay introduced

Bollards to be refurbished.

New Autumn Woburn block paving.

Traffic Calming measures retained.

Job Cen

Bus Stop removed and Taxi Bays extended to allow for Disable Bay to be introduced.

VINE STREET

Tarmac surfacing to immediate front of building edged with header course of pavers.

Footpath area under trees de-cluttered to form an uninterupted pedestrian corridor to encourage pedestrian flow.

1.5m cycle lane.

Recently completed Redditch Phase 2 scheme.

Evesham Walk

Market Walk

Library

Kingfisher Shopping Centre

Kingfisher Walk

Worcester Square

Market Walk

ALCESTER WALK

STATION WAY (be

IZOD STREET

PO